



DETACHABLE GOOSENECK (BUS-EX) TRAIL-EZE®



TE100DGB-EX:

**100,000 lbs. distributed (OPEN AND CLOSED)
100,000 lbs. concentrated in 12' (CLOSED ONLY)
3 axles at 60" spacing**

Standard Configuration

LETTER (A,B,C,...) CORRESPONDS WITH LINE DRAWING ON BACK

Overall Length (A)	53' - 60'
Width	8' 6"
Gooseneck Length (B)	11'
Unloaded 5th Wheel Height	50"
King Pin Setting (C)	14"
Swing Clearance (D)	84"
Main Deck Length (E)	24' 6" - 31' 6"
Rear Porch Length (F)	56"
Loaded Deck Height (G)	22"

GOOSENECK: Adjustable, 5-position deck height.

PLATFORM: 1 1/2" Apitong decking, excavator cut out, recessed load bearing bolsters, removable half bolster at front of wheel area.

OUTRIGGERS: Swingout outriggers on 24" centers; heavy duty front pullout.

RAMPS: 31" steel front flip ramps. 6' aluminum ramps, stored on neck.

TIE DOWNS: Choice of style (D-rings, stake pockets or chain slots) and spacing.

AXLES: 25,000 # with Stemco Platinum oil seals

BRAKES: 12 1/4" X 7 1/2" with outboard drums, auto slack adjusters and spring brakes.

WHEELS: 6.75" X 17.5" hub piloted

TIRES: 235/75R17.5 18 Ply radials

SUSPENSION: Air ride with dump valve, adjustable ride height.

OPERATION: Hydraulic detachable gooseneck with air activated lock. PTO operated hydraulics. Hydraulic neck support arm. Hydraulics set to operate at 3,000 PSI with maximum flow of 12 GPM.

ELECTRICAL: Grote Ultra-Blue harnesses with LED lights.

FINISH PROCESS: White metal blast pretreatment eradicating 100% of the dirt, rust, mill scale and other contaminants. Trailer then finished with a PPG epoxy primer, and two-part PPG polyurethane topcoat.

FRAME: Custom manufactured I-beams cambered for rated payload.

WARRANTY: Limited 5-Year Major Structural Warranty.



TRAIL-EZE®



Optional 20,000# hydraulic winch, mounted at rear of gooseneck and/or in rear porch.



6' aluminum ramps for lower load angle, mounted on neck.




7' deck extension with 7' telescoping bed ramps. Stored within frame of trailer.



Many custom light options to fit your needs.



Swingout outriggers, includes heavy duty front pullout outrigger.

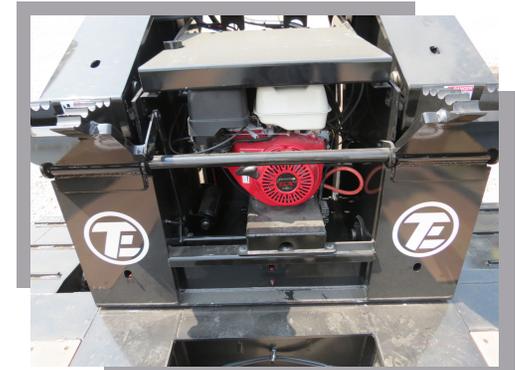

Optional self-contained unit to operate all hydraulics. Mounted in base of gooseneck.

